

FIGURE 1

1. A method of manufacturing a composite material, comprising:
2. providing a plurality of layers of a first material;
3. providing a plurality of layers of a second material;
4. interleaving the layers of the first material and the layers of the second material;
5. curing the interleaved layers to form a composite material.

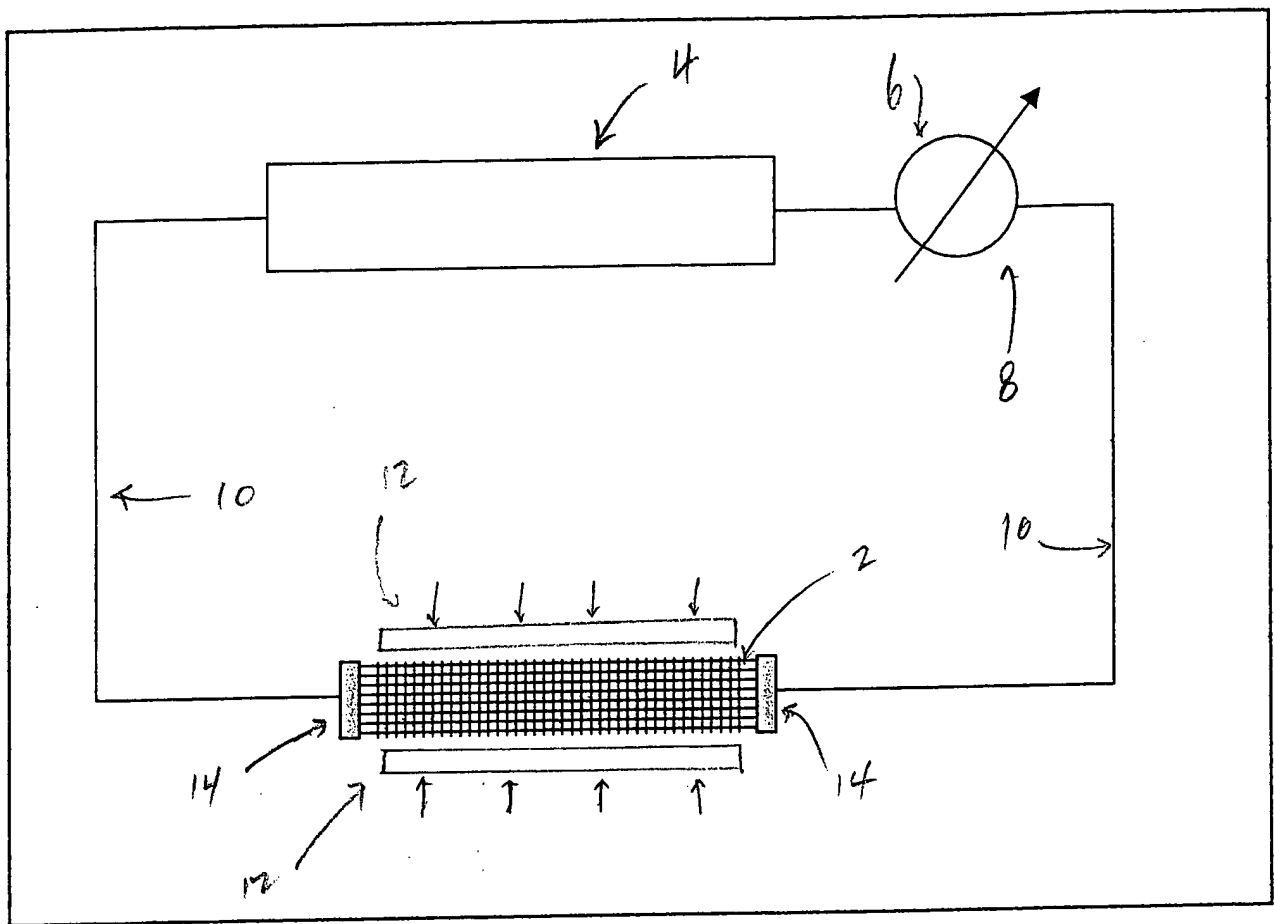


FIGURE 2

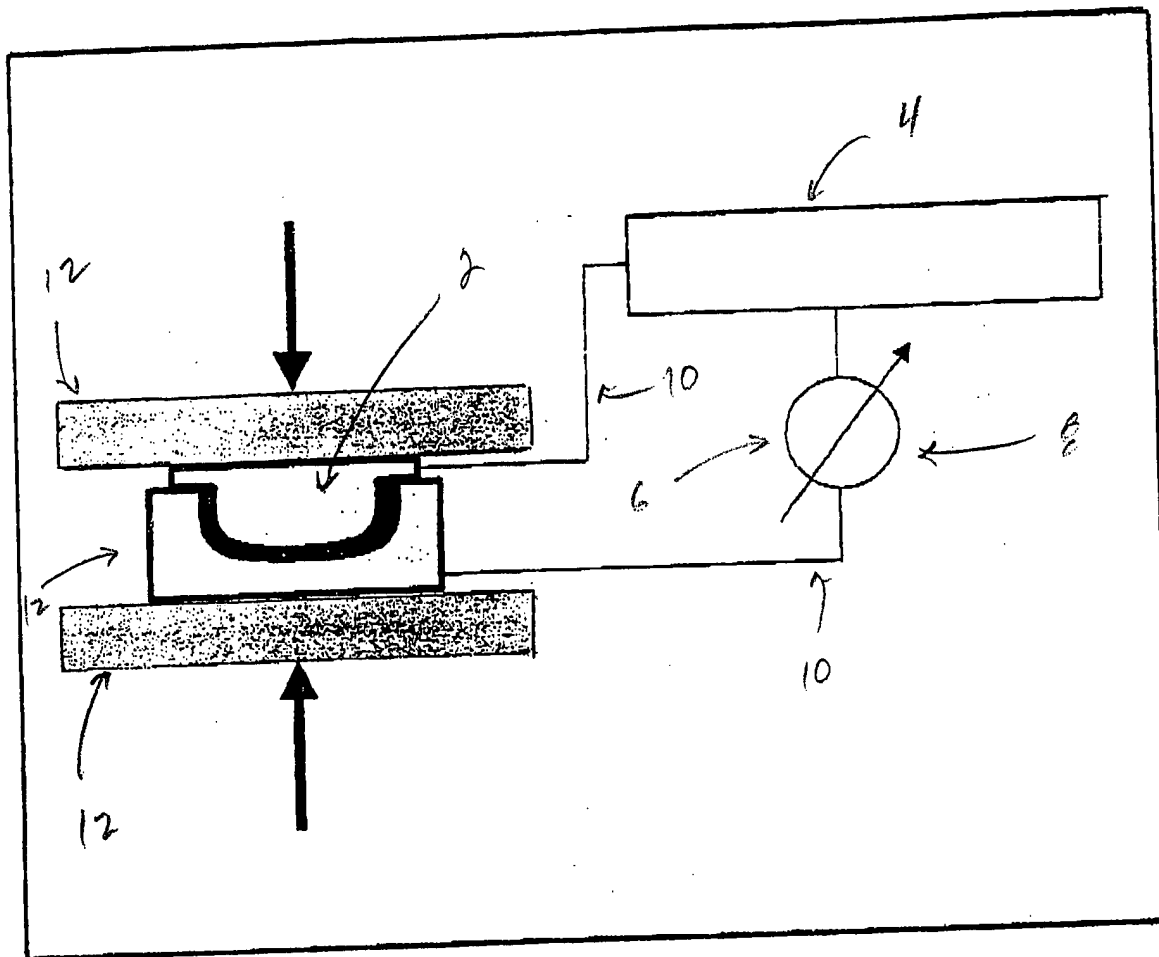


FIGURE 3